


JIS 5K Duplex Oil Stainer(H-Type)
JIS 10K Duplex Oil Stainer(H-Type)

JIS F7208
JIS F7208

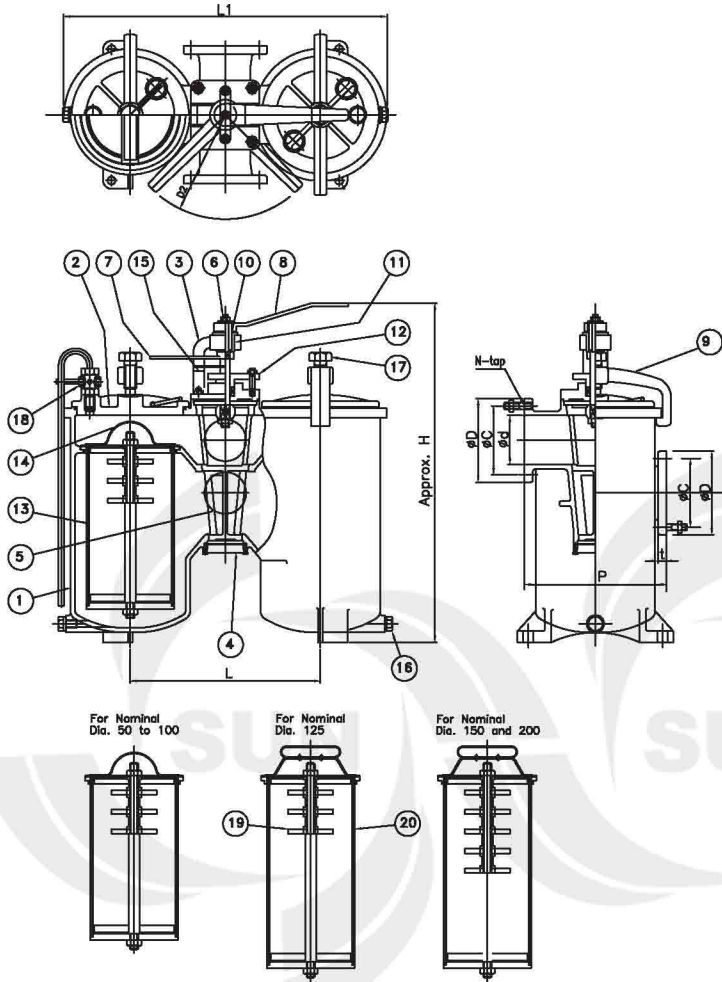

NO.	PARTS	MATERIAL
1	BODY	CAST IRON
2	COVER	CAST IRON
3	UPPER COCK COVER	CAST IRON
4	LOWER COCK COVER	CAST IRON
5	COCK	BRONZE
6	COCK SHAFT	STEEL
7	COCK CHAIN HANDLE	STEEL
8	COCK LIFT HANDLE	STEEL
9	COVER YOKE	DUCTILE IRON / STEEL
10	LIFTING THREAD	STEEL
11	SCREW RING	BRONZE
12	PACKING GLAND	BRONZE
13	STRAINER CYLINDER	STEEL
14	STRAINER HANDLE	STEEL
15	INDICATOR	BRASS
16	PLUG	BRASS
17	COVER PUSHING BOLT	BRASS
18	AIR VENT COCK	BRONZE
19	MAGNET	
20	WIRE GAUZE	STAINLESS STEEL

Dimension Table (Unit : mm)

Rating	Size	φd	φD	φC	N-tap	t	L	L1	H	P	Weight (kg)
JIS 5K (JIS F7203)	50A	50	130	105	4-M12	17	260	415	516	180	47
	65A	65	155	130	4-M12	18	324	514	661	215	83
	80A	80	180	145	4-M16	18	380	600	685	245	132
	100A	100	200	165	8-M16	20	456	718	816	285	202
	125A	125	235	200	8-M16	20	544	852	952	330	321
	150A	150	265	230	8-M16	22	680	1046	1299	410	567
	200A	200	320	280	8-M20	24	820	1250	1520	490	1185
Rating	Size	φd	φD	φC	N-tap	t	L	L1	H	P	Weight (kg)
JIS 10K (JIS F7203)	50A	50	155	120	4-M16	17	260	415	516	180	47
	65A	65	175	140	4-M16	18	324	514	661	215	83
	80A	80	185	150	8-M16	18	380	600	685	245	132
	100A	100	210	175	8-M16	20	456	718	816	285	202
	125A	125	250	210	8-M20	20	544	852	952	330	321
	150A	150	280	240	8-M20	22	680	1046	1299	410	567
	200A	200	330	290	12-M20	24	820	1250	1520	490	1185

Test Pressure (MPa)

Rating	JIS 5K	JIS 10K
Hydrostatic press test (Shell)	0.6	0.6
Hydrostatic press test (Cock)	0.44	0.44

Remark : 1. The flanges shall conform to nominal pressure 5K and 10K of JIS B 2210.
2. The diameter and pitch of strainer cylinder holes shall be 12mm and 15mm respectively.